


SB220 THRU SB2B0

SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 100 Volts Forward Current - 2.0 Ampere

DO-15

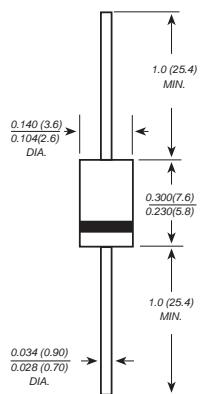

Dimensions in inches and (millimeters)

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Metal silicon junction,majority carrier conduction
- ◆ Low power loss,high efficiency
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:
250°C/10 seconds,0.375"(9.5mm) lead length,
5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: JEDEC DO-15 molded plastic body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.014 ounce, 0.40 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.

	SYMBOLS	SB 220	SB 230	SB 240	SB 250	SB 260	SB 270	SB 280	SB 290	SB 2B0	UNITS		
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	70	80	90	100	VOLTS		
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	49	56	63	70	VOLTS		
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	70	80	90	100	VOLTS		
Maximum average forward rectified current 0.375"(9.5mm) lead length(see fig.1)	I _(AV)	2.0								Amp			
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	60.0								Amps			
Maximum instantaneous forward voltage at 2.0A	V _F	0.55		0.70		0.85							
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	0.5								mA			
		10.0											
Typical junction capacitance (NOTE 1)	C _J	220		80									
Typical thermal resistance (NOTE 2)	R _{qJA}	50.0								°C/W			
Operating junction temperature range	T _J	-65 to +125		-65 to +150									
Storage temperature range	T _{STG}	-65 to +150								°C			

Note:1.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2.Thermal resistance from junction to ambient at 0.375"(9.5mm)lead length,P.C.B. mounted

RATINGS AND CHARACTERISTIC CURVES SB220 THRU SB2B0

AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES


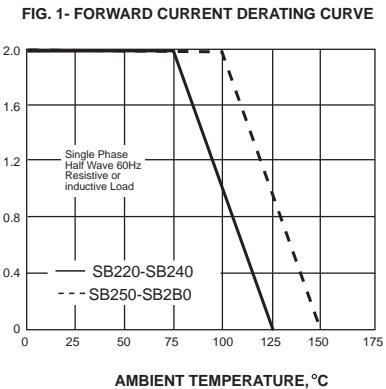


FIG. 1- FORWARD CURRENT DERATING CURVE

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

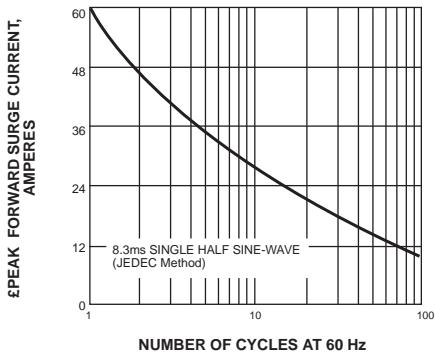

INSTANTANEOUS FORWARD
CURRENT,AMPERES

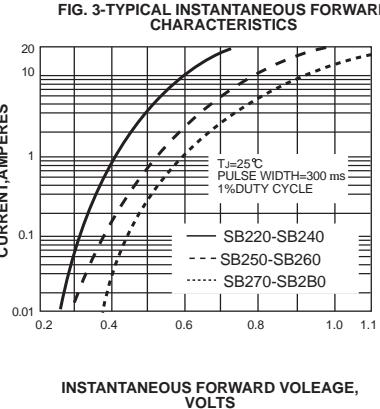


FIG. 3-TYPICAL INSTANTANEOUS FORWARD
CHARACTERISTICS

INSTANTANEOUS REVERSE CURRENT,
MILLIAMPERES

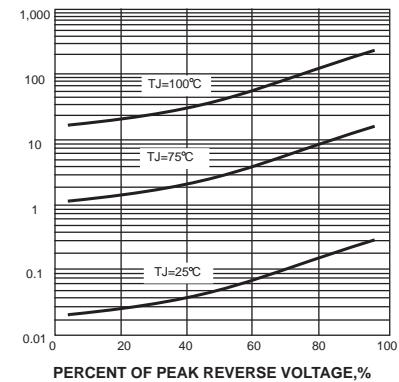


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

JUNCTION CAPACITANCE, PF

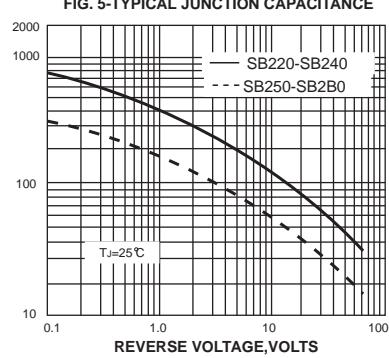


FIG. 5-TYPICAL JUNCTION CAPACITANCE

TRANSIENT THERMAL IMPEDANCE,
°C/W

