


# SB320 THRU SB3B0

## SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 100 Volts   Forward Current - 3.0 Amperes

### DO-201AD

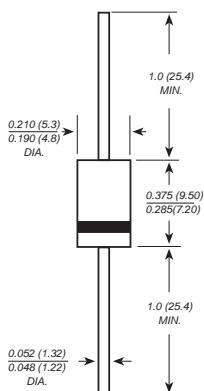

Dimensions in inches and (millimeters)

### FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- High forward surge current capability
- High temperature soldering guaranteed:  
250°C/10 seconds, 0.375" (9.5mm) lead length,  
5 lbs. (2.3kg) tension

### MECHANICAL DATA

**Case:** JEDEC DO-201AD molded plastic body

**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.04 ounce, 1.10 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.


	SYMBOLS	SB 320	SB 330	SB340SB 350	SB 360	SB 370	SB 380	SB 390	SB 3B0	UNITS
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	50	60	70	80	90	100
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	35	42	49	56	63	70
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	50	60	70	80	90	100
Maximum average forward rectified current 0.375" (9.5mm) lead length(see fig.1)	I <sub>(AV)</sub>									Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>									Amps
Maximum instantaneous forward voltage at 3.0A	V <sub>F</sub>		0.55	0.70			0.85			Volts
Maximum DC reverse current   TA=25°C at rated DC blocking voltage   TA=100°C	I <sub>R</sub>			0.5						mA
			20.0			10.0				
Typical junction capacitance (NOTE 1)	C <sub>J</sub>		250			160				pF
Typical thermal resistance (NOTE 2)	R <sub>qJA</sub>			40.0						°C/W
Operating junction temperature range	T <sub>J</sub>	-65 to +125			-65 to +150					°C
Storage temperature range	T <sub>STG</sub>				-65 to +150					°C

**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.


2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

# RATINGS AND CHARACTERISTIC CURVES SB320 THRU SB3B0


AVERAGE FORWARD RECTIFIED CURRENT,  
AMPERES

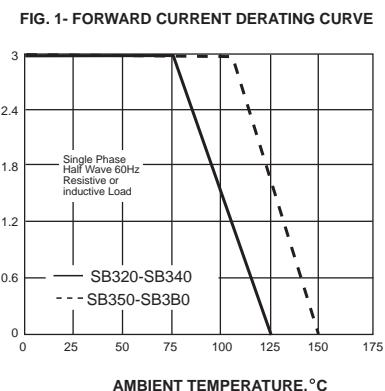


PEAK FORWARD SURGE CURRENT,  
AMPERES

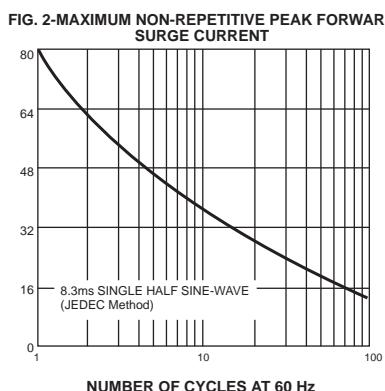


INSTANTANEOUS FORWARD  
CURRENT AMPERES

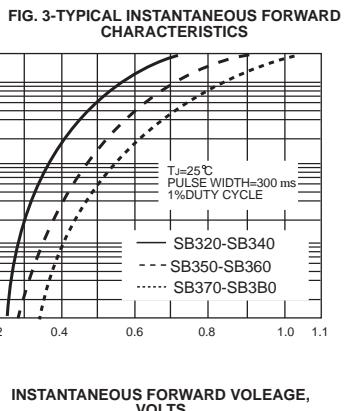

INSTANTANEOUS REVERSE CURRENT,  
MILLIAMPERES

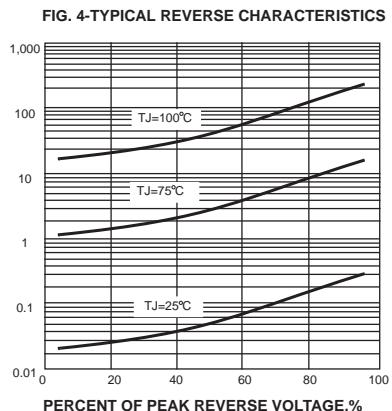

JUNCTION CAPACITANCE, pF

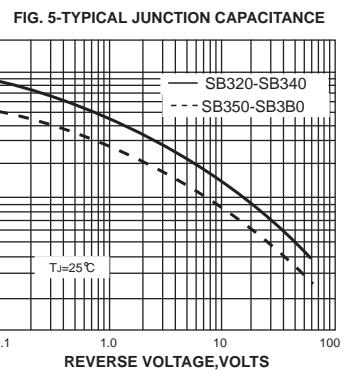

TRANSIENT THERMAL IMPEDANCE,  
°C/W

