

# SS52 THRU SS520

**SURFACE MOUNT  
SCHOTTKY BARRIER RECTIFIERS**

**REVERSE VOLTAGE - 20 to 200 Volts  
FORWARD CURRENT - 5.0 Amperes**


## FEATURES

- Metal-Semiconductor junction with gard ring
- Epitaxial construction
- Low forward voltage drop
- High current capability
- The plastic material carries UL recognition 94V-0
- For use in low vlotage, high frequency inverters, free wheeling, and polarity protection applications

## MECHANICAL DATA

- Case: Molded Plastic
- Polarity:Color band denotes cathode
- Weight: 0.22 grams

**DO-214AB**

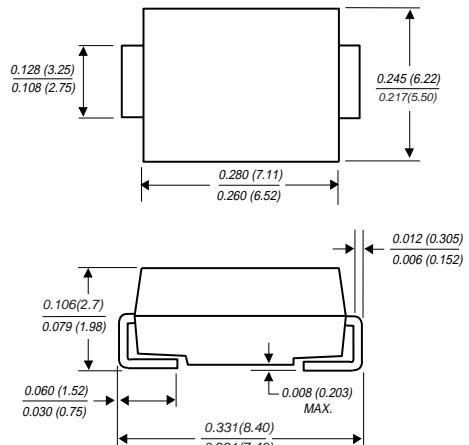

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.

CHARACTERISTICS	SYMBOL	SS52	SS53	SS54	SS55	SS56	SS58	SS510	SS515	SS520	UNIT						
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	20	30	40	50	60	80	100	150	200	V						
Maximum RMS Voltage	V <sub>RMS</sub>	14	21	28	35	42	56	70	105	140	V						
Maximum DC Blocking Voltage	V <sub>DC</sub>	20	30	40	50	60	80	100	150	200	V						
Maximum Average Forward Rectified Current 0.375" (9.5mm) Lead Lengths	I <sub>(AV)</sub>	5.0								A							
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	I <sub>FSM</sub>	100								A							
Maximum Forward Voltage at 5.0A DC	V <sub>F</sub>	0.55		0.7		0.85		0.95		V							
Maximum DC Reverse Current @T <sub>J</sub> =25°C at Rated DC Bolcking Voltage @T <sub>J</sub> =100°C	I <sub>R</sub>	0.2 20		1.0 50						mA							
Typical Junction Capacitance (Note1)	C <sub>J</sub>	500		350						pF							
Typical Thermal Resistance (Note2)	R <sub>θJA</sub>	15		10						°C/W							
Operating Temperature Range	T <sub>J</sub>	-55 to +150								°C							
Storage Temperature Range	T <sub>STG</sub>	-55 to +150								°C							

NOTES: 1.Measured at 1.0 MHz and applied reverse voltage of 4.0V DC

2.Thermal resistance junction to ambient,

## RATING AND CHARACTERISTIC CURVES SS52 thru SS520

FIG. 1 – FORWARD CURRENT DERATING CURVE

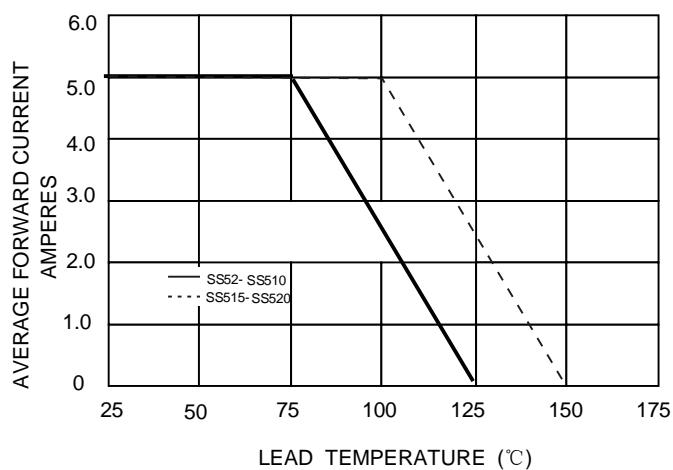


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

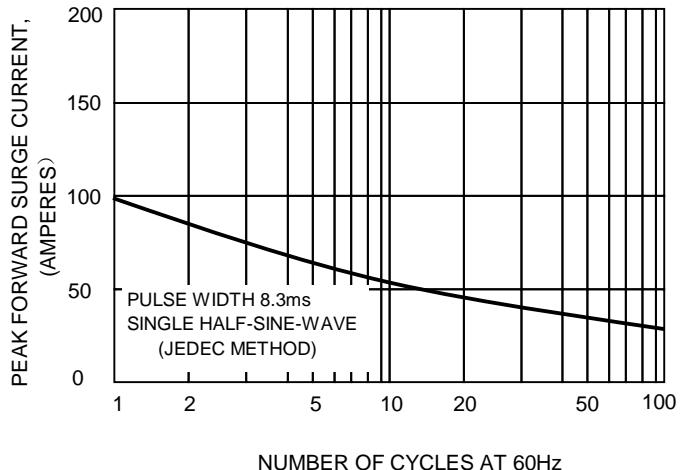


FIG.3 – TYPICAL JUNCTION CAPACITANCE

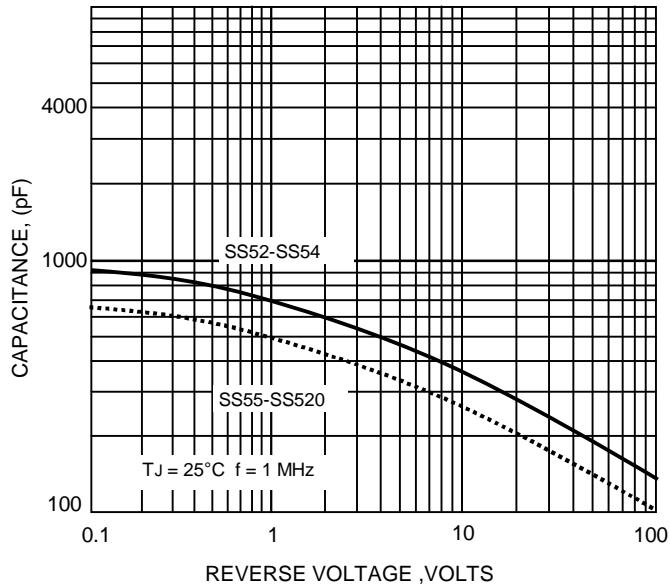


FIG.4-TYPICAL FORWARD CHARACTERISTICS

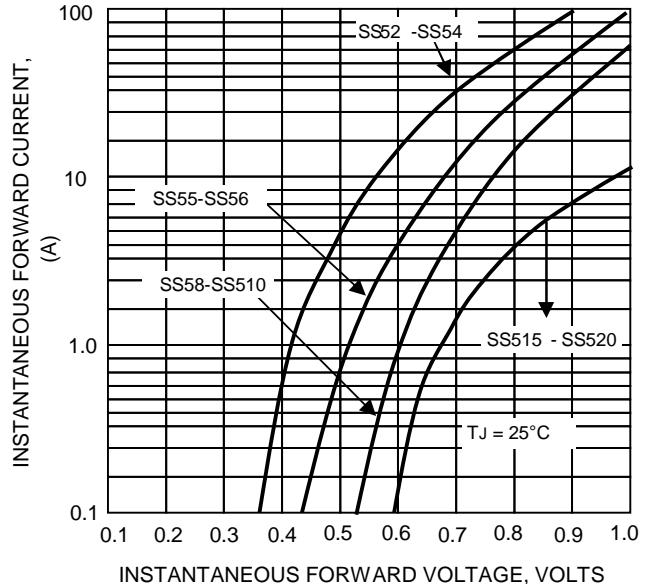


FIG.2-TYPICAL REVER CHARACTERISTICS

